

IWN-23IR

IP BULLET IR




KEY FEATURES

- High performance CMOS, 1080P resolution
- H.264, dual-stream
- Max resolution: 1920*1080
- Onvif and P2P supported
- IR Cut Filter, dWDR
- 3pcs IR Array, up to 25 meter
- IP66
- 2.8mm fix lens



SPECIFICATION		IWN-23IR
System framework	Embedded Linux	
Sensor	1/2.9" SONY CMOS	
Minimum illumination	Color 0.1Lux@F1.2,white/black 0.01 Lux@F1.2	
WDR Range	DWDR; DWDR Range>80db	
video processing	H.264,dual-stream,CBR/VBR,32K~16M bit/S adjustable,1-30fps adjustable	
Main stream	1920*1080,1-25(30)fps 1280*720,1-25(30)fps	
Sub stream	720*576,1-25(30)fps ; 640*480,1-25(30)fps 640*352,1-25(30)fps; 320*240,1-25(30)fps	
Network Port	1 RJ45 ethernet network port, 10M/100M self-adaption	
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP	
IR linkage	support	
Operation function	Support WEB setting, OSD,real-time video transmission; motion detection; unified client remote management software, platform system application; complete SDK provided	
Standard protocol	Onvif 2.4	
Mobile monitor	Support P2P, (IOS, Android)	
Power supply	DC10.8V~13.2V, PoE / 450mA	
Working temperature	-20C~55C	
Protection rate	ESD 1kv	
IR Series Distance	Max. 25 Meter with 3pcs IR Array	
Lens	2.8mm fix lens	
Camera size	63.09*210.5mm	

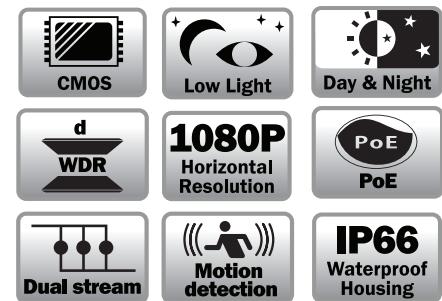

DIMENSIONS

